

TJ-60

Simple product filling and packaging machine (liquid or powder)



There are various special features of compact size and easy to use. Basic operation is only "pressing the button"!

Product quantity is small therefore filling materials are unable to be filled into the small sachet.

There are wide varieties of filling materials but these products quantity is small used up soon.

Original seasoning would like to be filled and packaged small and using quantity in the every day.

Products would like to be distributed only using quantity per a day each store.



"Professional filling and packaging machine is not needed but is there anything that is easy to use and inexpensive packaging machine?" We can skillfully meet your needs!

We are manufacturing the compact and easy to use product filling and packaging machine!

KOMACK

TJ-60

Simple product filling and packaging machine
(liquid or powder)

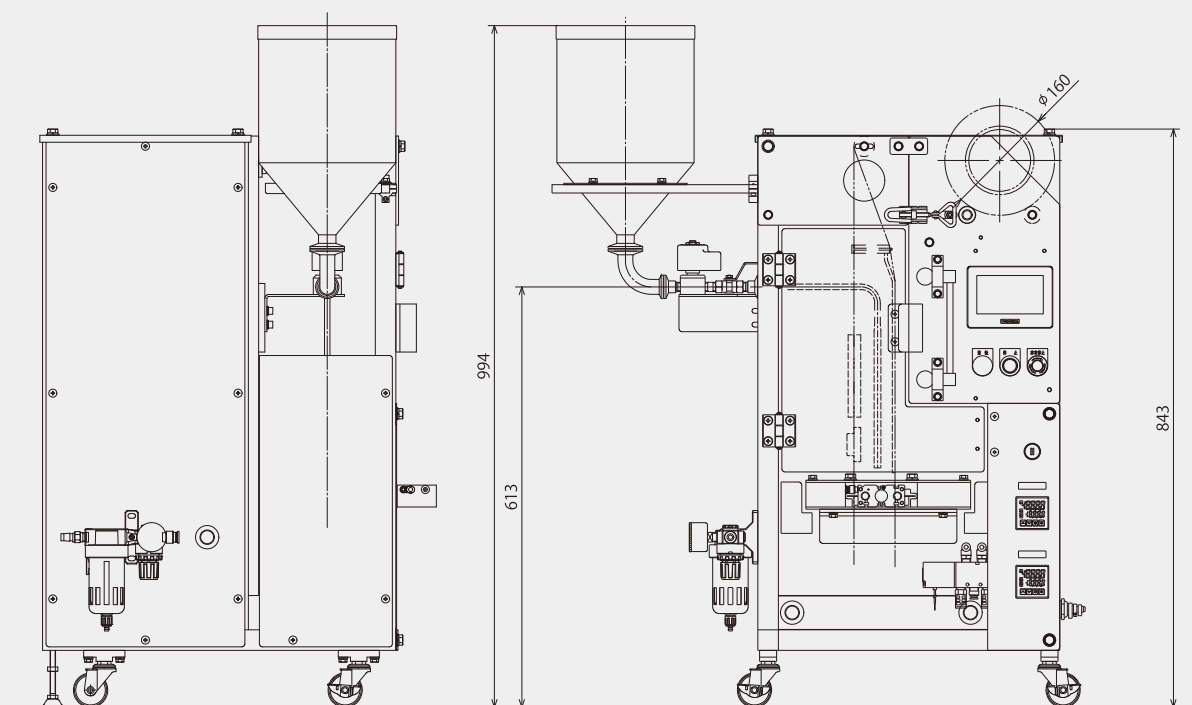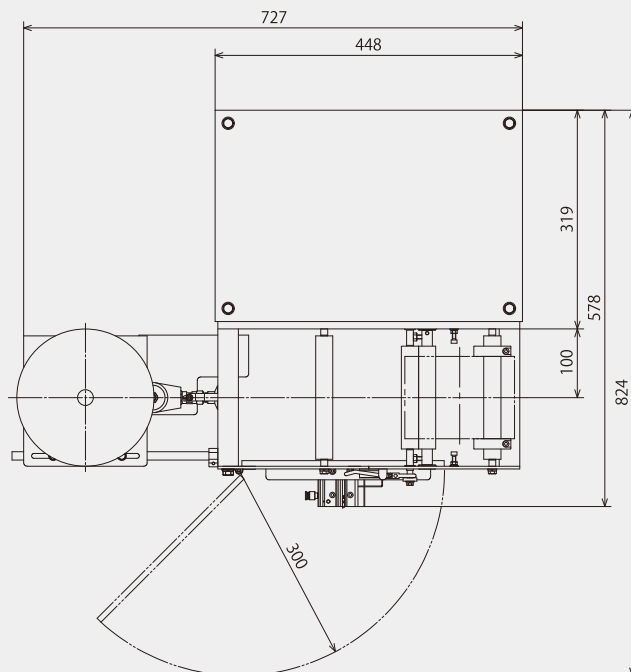

Standard specification

Packaging pattern : 3side seal
Packaging speed : 1~30 pouches/min (When the 80mm pitch)
Variable range of pitch : 50~100mm
Shape of cutting blade : Zigzag cutting, pitch 2mm, angle 60°
Seal width : Vertical seal cross-checked pattern 8mm/Horizontal seal lined pattern 8mm
Maximum film meter : 500mm per 1roll
Power consumption : Single-phase 100V 15A 1.2kW
Air consumption : 60NL/min (30pouches/min when the continuous operation)
Air pressure : 0.5MPa
Machine dimension : (W) 448mm x (L) 578mm x (H) 843mm
Machine weight : Approximate 65kg
Option : Compressor

【Filling device for liquid】

Filling materials : Liquid・powder (Only intermittently filling)
Filling volume : 1~20cc
Measurement method : Plunger pump (CV10・CV20・RV10・RV20, Please select 4types.) or natural falling method
Range of product width : 30mm・40mm・50mm・60mm (Please select 4types.)

【Filling device for powder】

Filling materials : Powder (Granule or good fluidity powder)
Filling volume : 3~12cc・10~25cc (Please select 2types.)
Measurement method : Slide measurement method
Range of product width : 30mm・60mm (Please select 2types.)

●Contact Us

KOMACK co.,Ltd.
<http://www.komack.co.jp/>

35-4,Arakawa 5-chome,Arakawa-ku,Tokyo 116-0002,Japan
TEL.03-5692-4526 FAX.03-5692-4527